

StoCleyer W

Application guideline

Prefabricated timber constructions

Facade



Facade coverings

StoCleyer W facade panels can be used to create an authentic timber appearance on external wall insulation systems.

The panels are quick and easy to apply. They are more cost-effective and durable than real wood and can be painted in many colour shades.



View this guideline as a film:

Simply scan the QR code or
go to the YouTube channel.

Please note that the details, illustrations, general technical information, and drawings contained in this brochure are only general proposals and details which merely describe the basic functions schematically. They are not dimensionally accurate. The applicator/customer is solely responsible for determining the suitability and completeness of the products used for the respective construction project. Neighbouring works are described only schematically. All specifications and information must be adjusted or agreed in the light of local conditions and do not constitute work, detail, or installation plans. The technical specifications and product information included in the Technical Data Sheets and system descriptions/ approvals must be observed.

Info service

Telephone +49 7744 57-1131
info.international@sto.com
www.sto.com



General information

Approvals/standards

StoCleyer W facade panels are used in timber frame construction in accordance with the national technical approval. The approval is to be observed in conjunction with the applicable standards and regulations.

In accordance with the system approval and DIN DIN 55699 (application of EWIS), all system components must be purchased from Sto.

Upon completion of the system, the client must receive confirmation that the EWIS has been executed correctly in accordance with the national technical approval.

Preliminary work

Details, such as plinth formation, connections to adjacent building elements (window/door frame, window sill, roof, sheet metal, etc.), structural expansion joints, projections, must be planned in advance and coordinated between the relevant parties. The application instructions issued by Sto must be followed.

The party responsible for creating the wall structure must ensure sufficient moisture protection in the wall and plinth area.

The building physical function of the overall wall structure must be checked in advance by carrying out a building physical calculation. We recommend taking into account future coatings, such as those involved in renovation work, during this process.

It is important to bear in mind the application temperature and weather conditions ($\geq +5^{\circ}\text{C}$).

Interior work with high humidity (e.g. screed, plaster) must be completed before executing the facade insulation system.

All metal parts are subject to deformation, e.g. due to thermal stress. Plan or carry out plumbing work in such a way that possible movements cannot be transferred to the plaster.

Facade surfaces must be protected from excessive UV/solar radiation, which can be caused, for example, by glass surfaces on balcony railings. The burning lens effect may occur particularly in summer and when glass is exposed to direct sunlight, e.g. in the case of balcony railings made of glass. Temperatures can heat up considerably behind the glass and cause irreversible damage to the facade surface.


The light reflectance value of the finish must be at least 20 % for a mineral base coat and at least 15 % for an organic base coat.

The StoCleyer W panels should be stored in dry conditions and not at less than 15°C prior to installation.



The system

System build-up

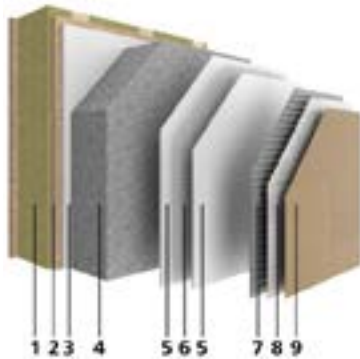

- 1 — Timber frame***
- 2 — Boarding**
- 3 — Adhesive**
StoArmat Classic Plus F
Alternative: StoColl Mineral HP
- 4 — Insulation**
Sto-Insulation Board Top32
Alternative: Sto-Speed Lamella or Sto-Stone Wool Insulation Board
- 5 — Base coat**
StoArmat Classic Plus F
Alternative: StoLevell Uni
- 6 — Reinforcement**
Sto-Glass Fibre Mesh F
- 7 — Adhesive**
StoArmat Classic Plus F
- 8 — Facade embellishment**
StoCleyer W
- 9 — Top paint coat (2x)**
StoAqua Top Satin

* As wall structure also solid wood board elements or cross laminated timber.

Note

Alternative products are defined in the approval.

System description

Insulant	- Polystyrene - Stone wool insulation board/lamella - Wood fibre
Area of application	- New and existing buildings up to building class 3 - Suitable for low energy houses
Substrate	- Board materials (≥ 12 mm) are standardised or comply with building inspection requirements - On standardised or approved solid wood board elements or cross laminated timber
Adhesive	Mineral or organic
Base coat	Mineral or organic
Surface	- StoCleyer W with StoAqua Top Satin - Lasure with a light reflectance value ≥ 15 % for organic base coats - Lasure with a light reflectance value ≥ 20 % for mineral base coats
Fire protection	B2 (normal combustibility)
Thermal protection	- Insulation boards made of wood fibre, up to 260 mm: design thermal conductivity of thermal conductivity group 0.039–0.049 W/(m²K) - Insulation boards made of polystyrene, up to 400 mm: design thermal conductivity of thermal conductivity group 0.032–0.040 W/(m²K) depending on insulation board - Insulation boards made of non-combustible stone wool insulation board, up to 200 mm: design thermal conductivity of thermal conductivity group 0.035–0.040 W/(m²K) depending on insulation board - Insulation boards made of non-combustible stone wool insulation lamella, up to 200 mm: design thermal conductivity of thermal conductivity group 0.041 W/(m²K)
Properties	- Mechanically resistant - Highly crack-proof - Organic and mineral can be combined
Approval	- Z-33.47-1705 (for polystyrene, stone wool insulation board, and stone wool lamella) - Z-33.47-659 (for wood fibre)



Application

Substrate/Moisture barrier

Note

The application steps for a suitable external wall insulation system with StoCleyer W differ only in the finish. The system build-ups up to and including the reinforcing coat are identical.



1 An additional moisture barrier is recommended in areas with increased moisture levels, e.g. plinths, balconies, terraces, or other areas with increased exposure to splash water. Mix StoFlexyl and StoFlexyl Cement at a ratio of 1 : 1 and dilute with 10 % water. Then apply two full coats of the substrate.

Bonding/Installation



1 Apply StoArmat Classic Plus F with a notched trowel (6 x 6 mm) onto the substrate. Only decant as much reinforcing compound as you can immediately cover. Ensure that no skin forms.



2 Cut the StoCleyer W panels to size with a utility knife. Cut on the rear side of the panels.



Application

Corner formation




When installing StoCleyer W panels, start with the corner formation.



Press the panels with the rubber roller so that StoArmat Classic Plus F flows out at the sides. This ensures that the joints are completely closed and protected against moisture ingress.


Bonding/Installation




Cut the panel for the surface to size ensuring that the outer edge projects sufficiently (approx. 1 cm) and bond the panel. Press with a rubber roller.



Apply the next layer of StoArmat Classic Plus F to the surface and corners. Install repeating the same process as for the first row. Place the panels about 3–5 mm from the joint and push them together.



Allow the excess StoArmat Classic Plus F to briefly harden and remove with a spatula.



Remove adhesive residues from the recesses with a damp paint brush.



Wipe off any remaining StoArmat Classic Plus F with a moist sponge.

Bonding/Installation



6

After a sufficient amount of drying time (at least 24 hours), cut off the projections flush with a sharp utility knife.



7

Sand any remaining projections with a sanding block (P 100 or P 120) or with a straight grindstone.

Note

This application cycle must not be carried out with an EWIS sanding board as this will raise the fibres of the panels. This can lead to moisture ingress.

Paint coat



1

After a sufficient amount of drying time, apply two coats of StoAqua Top Satin using a Sto-Wide Brush M3. Observe the drying time after the first paint coat.

Colour shades as required

Lasure

StoCleyer W can be glazed in various colour shades with StoAqua Top Satin. Featuring 40 colour shades, the StoLasuren range has been developed specifically for application on many different substrates, including StoCleyer facade panels.

Covering paint coat

StoCleyer W can be coated not only with lasures but also with Sto facade paints. The shades from the "Architectural Colours" fan are available for this purpose.

Always observe light reflectance values:

Colour shades with a light reflectance value of up to 15 % are possible for organic base coats and up to 20 % for mineral base coats.



Application

Plaster joint



1

The lasure must be completely dry before it is overcoated. Cover the edges of the panels with adhesive tape and protect the surface with masking film.



2

Apply and texture the finishing render. Immediately after applying, remove the adhesive tapes before the finishing render is dry to the touch. Observe the drying time before applying further coatings.

Optional paint coat



3

Mask the panels again before coating and protect them from soiling.



4

Apply two coats of the relevant facade paint. Immediately after applying, remove the adhesive tapes before the paint coat is dry to the touch.

Notes

Notes

Headquarters

Sto SE & Co. KGaA Market Development

Ehrenbachstrasse 1
79780 Stühlingen
Germany

Phone +49 7744 57-1131
info.international@sto.com
www.sto.com

Your Contact

Follow us on Social Media

 [www.instagram.com|sto_international](https://www.instagram.com/sto_international)
 [www.youtube.com|@Sto_Global](https://www.youtube.com/@Sto_Global)
 [www.linkedin.com | @Sto_global](https://www.linkedin.com/@Sto_global)

